



50W OPEN-FRAME AC-DC SWITCHING POWER SUPPLY **OPU50**



FEATURES:

- SINGLE & DUAL OUTPUTS
- 100% HI-POT TESTED @ 3KVAC PRI-SEC.
- 100% CYCLING BURNT-IN
- INSULATION 50M OHM PRI-SEC.
- LEAKAGE CURRENT < 0.25MA @ 240VAC
50HZ

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: 90-264Vac typical.
Input Connector: V-M connector
Input Frequency: 47-63Hz.
Inrush Current: 50A max. @ cold start 25 °C.
Input Current: 1.5A max. @ 90Vac.
Protection: 2A fuse on board.
EMI: FCC part 15 Class B, CISPR 22 Class B
Hold-up Time: >20mS @ full load 120Vac. typical

OUTPUT SPECIFICATION

Output Voltage: See Rating Charts
Output Current: See Rating Charts
Output Wattage: 50 Watts max.
Output Connector: V-M connector
Line Regulation: ± 1.0% typical.
Load Regulation: ± 5.0% typical.
Noise & Ripple: 1% peak to peak typical.
OVP: Build-in.
Overload Protection (OLP): Fully protected against short circuit and over power. Consult the factory for OLP setting.

GENERAL SPECIFICATION

Efficiency: 70% typical @ full load. **Operating Temperature:** 45W @ 0 to +50°C convection;
Transient Response: 10% @ 50% load change. 60W @ 20 CFM cooling.
Safety Standard: Meet UL60950/EN60950 Level B **Storage Temperature:** -20 to +85 °C.
Shock: MIL-STD-610C 516 Part V **Construction:** PCB format
Vibration: 10-500Hz 16 min/cycle/axis.

Note:


1. All measurements are at nominal input, full load, and +25 °C unless otherwise specified.
2. The exact obtainable load regulation depends upon the output cord selected and load current.
3. Due to requests in market and advances in technology, specifications subject to change without notification.

OUTPUT VOLTAGE / CURRENT RATINGS CHART

DUAL OUTPUTS *(Model No. for example)*

| MODEL NO. | OUTPUT# 2 | | OUTPUT# 1 | |
|-----------|-----------|---------------|-----------|---------------|
| | VOLTAGE | CURRENT (MAX) | VOLTAGE | CURRENT (MAX) |
| OPU50-105 | +5V | 6.0A | | |
| OPU50-112 | +12V | 5.0A | | |
| OPU50-115 | +15V | 4.0A | | |
| OPU50-124 | +24V | 2.5A | | |
| OPU50-201 | +5V | 6.0A | +12V | 1.5A |
| OPU50-202 | +5V | 6.0A | +15V | 1.2A |
| OPU50-203 | +5V | 6.0A | +24V | 0.8A |

MECHANICAL DIMENSIONS: MM

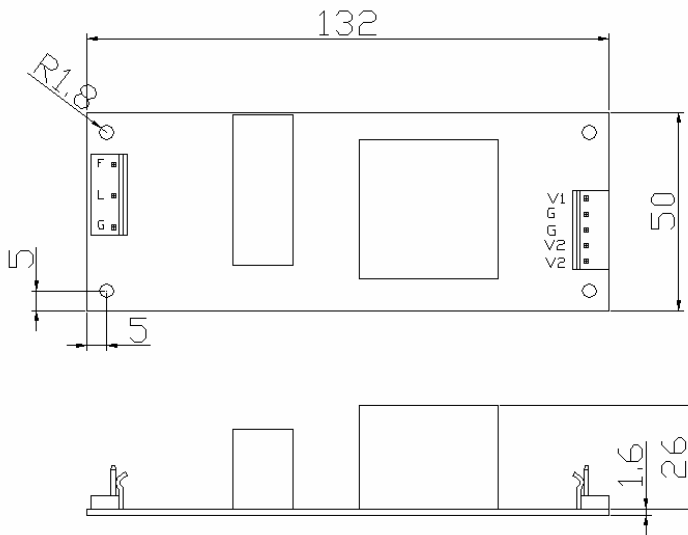

單位:mm